

de Lisle

KING DADDY AMPLIFIER

PRODUCT MANUAL

KING DADDY TECHNICAL DETAILS

Power	<1W to 16W RMS
Pre-Amp Tubes	1 x 12AX7, 1 x EF86, 1 x 12AU7
Power Tube(s)	2 x 6973
Speaker	1 x 12" 8 Ohm
Dimensions (W H D)	20 x 18.5 x 9.5
Weight	35 lbs.


CHANGING TUBES

Both the preamp tubes and power tubes are cathode biased, or self-biasing. You may replace these tubes without rebiasing.

You may substitute other tubes for the 12AX7, such as a 12AY7, 12AU7, 12AT7, etc. Do not use these tubes in place of the EF86 as the pin assignments are not the same. We also recommend that you do not change the 12AU7 in the phase inverter, since the stage was designed around this tube.

As a guideline, we recommend replacing preamp tubes at least every 3 years. Replace the power tubes and phase inverter every 12-18 months. With cathode biased amps, sooner is better than later. These recommendations are rather broad and your experience may vary based on actual usage.

CONTROL PANEL

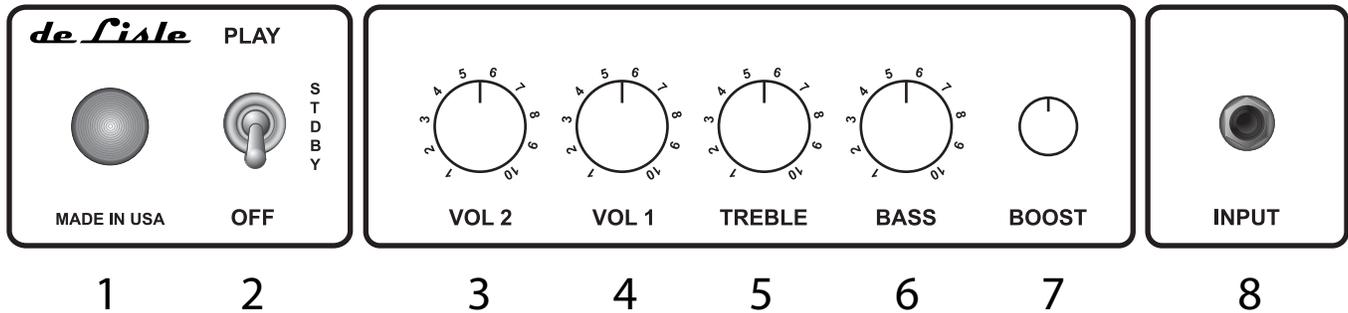

1. Pilot Light

The pilot indicates that the amp is powered on. Use #47 replacement bulbs.

2. Off / Stdbby / Play

This is a 3-position switch. The middle position places the amplifier in Stand-by mode. After 30 seconds, switch from Standby to Play.

3. Vol 2

This model is equipped with the VarioDyne power control. Vol 2 controls the overall power output from <1W to 16W.

4. Vol 1

Controls the loudness of the amplifier in conjunction with Vol 2. Turn up Vol 1 with Vol 2 turned down for overdriven sounds at lower sound levels.

5. Treble

Controls the amount of high frequency content.

6. Bass

Controls the amount of low frequency content.

7. Boost

This model is wired for a mid-boost. Turn the Boost knob counter clockwise to scoop the mids. Turning the Boost clockwise will result in a flatter mid-range response.

8. Input

Plug the guitar or output of your pedal board in here. Use only high-quality shielded instrument cable.

DE LISLE AMPLIFIER WARRANTY

de Lisle amplifiers are warranted to be free from defects in materials and workmanship for as long as the original purchaser owns the item. This warranty does not cover defects resulting from normal wear and tear, misuse, neglect, accident, modification, unauthorized service or repair, and/or physical damage to the chassis or cabinet. Tubes carry a 90 day warranty against manufacturing defects. Speakers are covered by the manufacturer's warranty.

All warranty repairs must be performed by de Lisle Guitar Company LLC. All transportation, insurance and shipping costs associated with the warranty service and/or repair of de Lisle amplifiers are the sole responsibility of the purchaser. This warranty is not transferable. Unauthorized modification will void this warranty.

Please contact us through <http://www.delisleguitar.com> or phone to inquire about warranty service.

de Lisle Guitar Company LLC
10805 Andrade Drive, Unit A
Zionsville, IN 46077